

AvaSpire® AV-651

polyaryletherketone

AvaSpire® AV-651 is an unreinforced polyaryletherketone (PAEK) that offers more ductility and impact strength than PEEK, with higher chemical and environmental stress cracking resistance than AvaSpire® AV-650. It has been specifically formulated for applications requiring a balance of chemical resistance and mechanical strength along with good part aesthetics, bridging the performance gaps within the ultra polymers space.

These properties make it well-suited for applications in healthcare, transportation,

electronics, chemical processing and other industrial uses.

AvaSpire® AV-651 can be easily processed by typical injection molding and extrusion methods using conventional processing equipment.

- Natural: AvaSpire® AV-651 NT
- Beige: AvaSpire® AV-651 BG 15
- Black: AvaSpire® AV-651 BK 95

General

Material Status	• Commercial: Active	
Availability	<ul style="list-style-type: none"> • Africa & Middle East • Asia Pacific • Europe 	<ul style="list-style-type: none"> • Latin America • North America
Features	<ul style="list-style-type: none"> • Autoclave Sterilizable • Biocompatible • Chemical Resistant • Ductile • E-beam Sterilizable • Ethylene Oxide Sterilizable • Fatigue Resistant • Flame Retardant • Good Dimensional Stability 	<ul style="list-style-type: none"> • Good Impact Resistance • Good Sterilizability • Heat Sterilizable • High Heat Resistance • Radiation (Gamma) Resistant • Radiation Sterilizable • Radiotranslucent • Steam Resistant • Steam Sterilizable
Uses	<ul style="list-style-type: none"> • Aerospace Applications • Aircraft Applications • Bearings • Dental Applications • Film • Hospital Goods • Industrial Applications 	<ul style="list-style-type: none"> • Medical Devices • Medical/Healthcare Applications • Oil/Gas Applications • Pump Parts • Seals • Surgical Instruments
Agency Ratings	• FAA FAR 25.853a ¹	• ISO 10993
RoHS Compliance	• RoHS Compliant	
Appearance	<ul style="list-style-type: none"> • Beige • Black 	• Natural Color
Forms	• Pellets	

AvaSpire® AV-651

polyaryletherketone

General

Processing Method	<ul style="list-style-type: none"> • Extrusion Blow Molding • Fiber (Spinning) Extrusion • Film Extrusion • Injection Blow Molding • Injection Molding 	<ul style="list-style-type: none"> • Machining • Profile Extrusion • Thermoforming • Wire & Cable Extrusion
-------------------	---	---

Physical	Typical Value	Unit	Test method
Density / Specific Gravity	1.29		ASTM D792
Melt Mass-Flow Rate (MFR) (400°C/2.16 kg)	25	g/10 min	ASTM D1238
Molding Shrinkage ²			ASTM D955
Flow : 3.18 mm	0.70 to 0.90	%	
Across Flow : 3.18 mm	1.0 to 1.2	%	
Water Absorption (24 hr)	0.20	%	ASTM D570

Mechanical	Typical Value	Unit	Test method
Tensile Modulus			
-- ³	3000	MPa	ASTM D638
--	3200	MPa	ISO 527-1/1A/1
Tensile Stress			
Yield	89.0	MPa	ISO 527-2/1A/50
-- ³	87.0	MPa	ASTM D638
Tensile Elongation			
Yield ³	6.2	%	ASTM D638
Yield	5.7	%	ISO 527-2/1A/50
Break ³	> 40	%	ASTM D638
Break	> 40	%	ISO 527-2/1A/50
Flexural Modulus			
--	3100	MPa	ASTM D790
--	3200	MPa	ISO 178
Flexural Strength			
--	124	MPa	ASTM D790
--	127	MPa	ISO 178
Compressive Strength	112	MPa	ASTM D695
Shear Strength	78.0	MPa	ASTM D732

Impact	Typical Value	Unit	Test method
Notched Izod Impact			
--	69	J/m	ASTM D256
--	6.6	kJ/m ²	ISO 180
Unnotched Izod Impact	No Break		ASTM D4812 ISO 180


Hardness	Typical Value	Unit	Test method
Rockwell Hardness (M-Scale)	94		ASTM D785

AvaSpire® AV-651


polyaryletherketone

Thermal	Typical Value	Unit	Test method
Deflection Temperature Under Load ⁴ 1.8 MPa, Annealed, 3.20 mm	190	°C	ASTM D648
Glass Transition Temperature	158	°C	ASTM D3418
Peak Melting Temperature	345	°C	ASTM D3418
CLTE - Flow (-50 to 50°C)	4.7E-5	cm/cm/°C	ASTM E831
Specific Heat			DSC
50°C	1310	J/kg/°C	
200°C	1820	J/kg/°C	
Thermal Conductivity	0.24	W/m/K	ASTM E1530
Electrical	Typical Value	Unit	Test method
Surface Resistivity	> 1.9E+17	ohms	ASTM D257
Volume Resistivity	5.0E+17	ohms-cm	ASTM D257
Dielectric Strength (3.00 mm)	16	kV/mm	ASTM D149
Dielectric Constant			ASTM D150
60 Hz	3.10		
1 kHz	3.12		
1 MHz	3.10		
Dissipation Factor			ASTM D150
60 Hz	1.0E-3		
1 kHz	1.0E-3		
1 MHz	4.0E-3		
Flammability	Typical Value	Unit	Test method
Flame Rating			UL 94
0.8 mm	V-0		
1.6 mm	V-0		
Fill Analysis	Typical Value	Unit	Test method
Melt Viscosity (400°C, 1000 sec ⁻¹)	240	Pa·s	ASTM D3835
Injection	Typical Value	Unit	
Drying Temperature	150	°C	
Drying Time	4.0	hr	
Rear Temperature	355	°C	
Middle Temperature	365	°C	
Front Temperature	370	°C	
Nozzle Temperature	375	°C	
Processing (Melt) Temp	365 to 390	°C	
Mold Temperature	150 to 180	°C	
Injection Rate	Fast		
Screw Compression Ratio	2.0:1.0 to 3.0:1.0		

Isothermal Stress vs. Strain (ISO 11403)

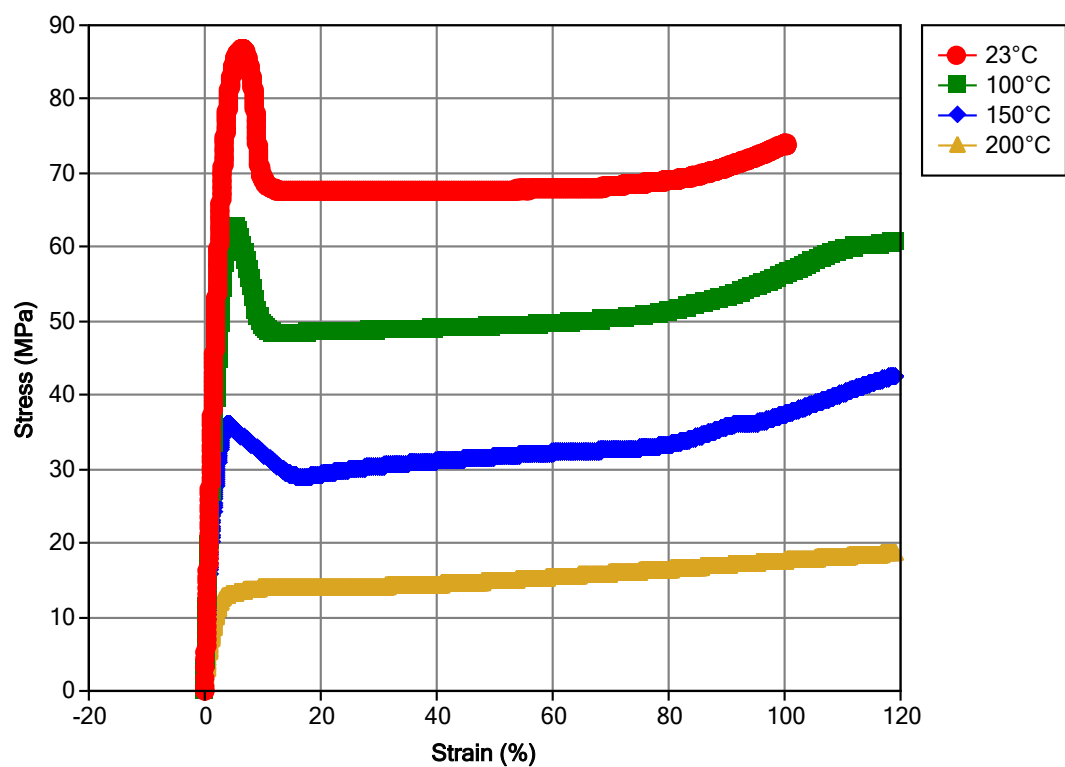

Viscosity vs. Shear Rate (ISO 11403)

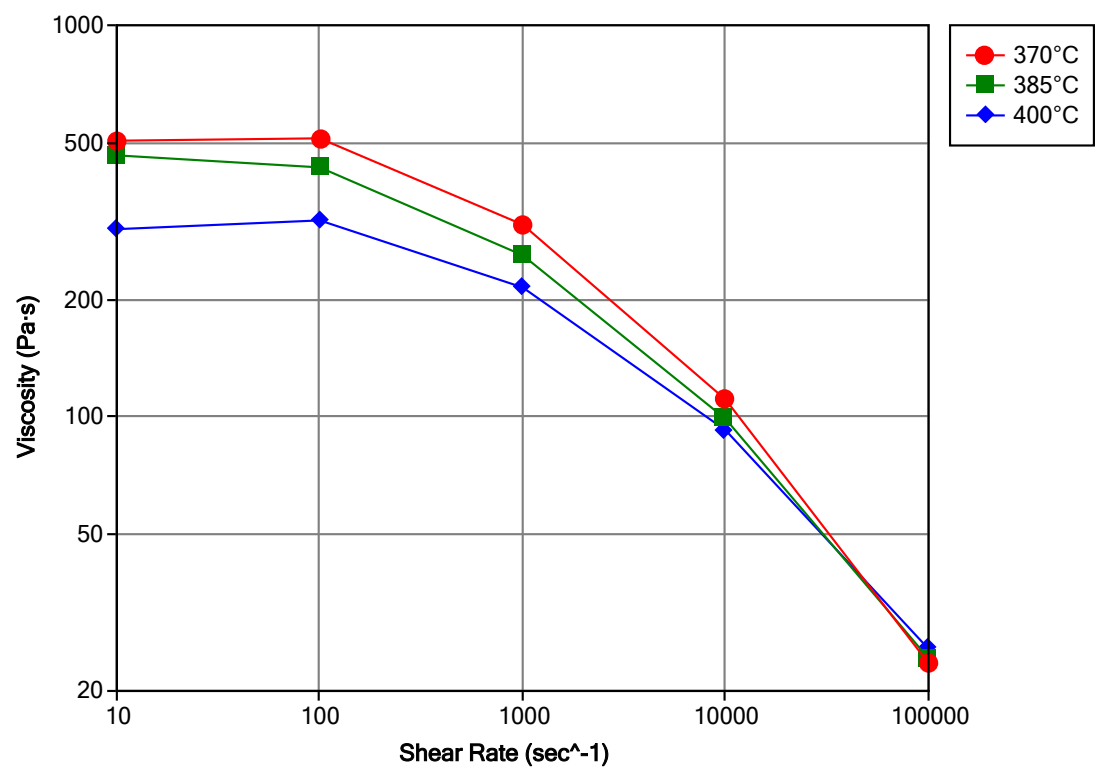

AvaSpire® AV-651

polyaryletherketone

Notes

Typical properties: these are not to be construed as specifications.

¹ Passes 60s VB flame, smoke & toxicity.

² 5" x 0.5" x 0.125"

³ 50 mm/min

⁴ 2 hours at 200°C

www.syensqo.com

Safety Data Sheets (SDS) are available by emailing us or contacting your sales representative. Always consult the appropriate SDS before using any of our products.

Neither Syensqo nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Syensqo's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Syensqo's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right.

All trademarks and registered trademarks are property of the companies that comprise the Syensqo or their respective owners.

© 2025 2023 Syensqo. All rights reserved.

